



FLEXIBLE / DESIGNABLE / RELIABLE

UHF-60LED-6W-NW-4kK-WP
UHF-60LED-6W-WW-3kK-WP

S shape flexstrip LED 2835 60LEDs/m, 6W/m-IP54




Description

S shape flex strip, suitable for channel letters and the other indoor lighting applications.
thin silicone coating IP54.

Dimensions

60 LEDs/m

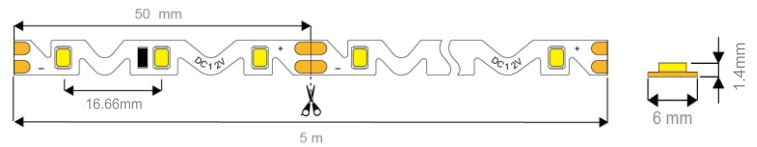

| General data | UHF-60LED-6W-NW-4kK-WP | UHF-60LED-6W-WW-3kK-WP |
|-------------------------|------------------------|------------------------|
| Max.length pwr input(m) | 5 | 5 |
| Voltage(V) | DC12 | DC12 |
| Power (W/m) | 5.7 | 5.7 |
| Length(m)/reel | 5 | 5 |
| PCB Width(mm) | 6 | 6 |
| Cooper foil | 20Z | 20Z |
| Chips/m | 60 | 60 |
| Cutting interval(cm) | 5 | 5 |
| Dimmable | Yes | Yes |
| Operate temperature | -20~40 °C | -20~40 °C |
| Warranty | 3Years | 3Years |
| Lumen(lm/m) | 513 | 439 |
| Efficacy(lm/W) | 90 | 77 |
| Color temperature(K) | 4000K | 3000K |
| CRI(Ra) | > 95 | > 95 |

Mark: The tolerance of output data can be vary up to 10%





UHF-60LED-6W-NW-4kK-WP
UHF-60LED-6W-WW-3kK-WP

FLEXIBLE / DESIGNABLE / RELIABLE

Photometric data

